



# काठमाडौं उपत्यका खानेपानी लिमिटेड

## महाकालचौर शाखा



चलानी नं. २१० / ०८१ / ०८२

मिति २०८१/१०/२५

श्री सूचना प्रविधि शाखा

काठमाडौं उपत्यका खानेपानी लिमिटेड

मुख्य कार्यालय त्रिपुरेश्वर ।

विषय : वेबसाईटमा सूचना प्रकासन गरिदिने सम्बन्धमा ।

उपरोक्त सम्बन्धमा यस शाखा अन्तर्गत का.म.न.पा. वडा नं. ७ गौरिघाट क्षेत्रमा खानेपानीको ४ इन्च HDPE Parallel पाईपलाईन कनेक्शन तथा Improvement कार्य मिति २०८१/१०/२० मा सदर भए बमोजिम का.म.न.पा. वडा नं. ७ बाट थ्रोत (वजेट) व्यवस्थापन भए पछि मात्र कार्य गर्ने गरि BOQ, Design र Drawing लाई तीन दिनको म्याद राखी सूचना कम्पनीको वेबसाईटमा मिति २०८१/१०/२७ गते १६:५५ बजेसम्म सूचिकृत निर्माण व्यवसायीबाट दररेट Hard copy वा email माफत माग गर्ने व्यवस्थाको लागि सूचना प्रकासन गरिदिने हुन अनुरोध छ ।

पुनश्च : दररेट पेश गर्दा अनिवार्य रूपमा एम मा 500KB नवढने गरि कम्पनीको साईट छाप गरि पेश गर्नु पर्ने छ ।

दररेट पेश गर्ने ठेगाना : का.उ.खा.पा.लि. महाकालचौर प्राविधिक फाँट

ईमेल ठेगाना : [ayerchetu@gmail.com](mailto:ayerchetu@gmail.com)

बोधार्थ :

श्रीमान प्रमुख कार्यकारी अधिकृत ज्यु

काठमाडौं उपत्यका खानेपानी लिमिटेड

मुख्य कार्यालय त्रिपुरेश्वर ।

का.म.न.पा.वडा नं. ७ को कार्यालय गंगोहिटी काठमाडौं ।

( ई. मिलन थापा )

कार्यालय प्रमुख

मुख्य कार्यालय, त्रिपुरेश्वर मार्ग, काठमाडौं

फोन नं ४११७३५८/४११७३५९

फ्याक्स नं : ००९७-१-४११७३५३

[www.kathmanduwater.org](http://www.kathmanduwater.org)

महाकालचौर शाखा

फोन नं. ५२१०३५७/५२१०१४३



**Kathmandu Upateyaka Khanepani Limited**  
**Mahankalchaur Branch Office**

**Bill Of Quantity**

Name of Project : 4" dia. HDPE Parallel pipeline connection & improvement works at Gaurighat Area

Location : Kathmandu -7 Gaurighat

Date : 2081-10-25

S. No.	Description of works	QTY.	Unit	Rates		Amount Rs.	Remarks
				In Figure	In Words		
1)	Earth work in excavation :						
a)	PCC dismantling works	0.44	m3				
b)	Gravel and Boulder Mixed Hard soil	68.40	m3				
2)	laying & joining of 4" dia PN10 HDPE pipe with joining all complete works	330.00	R.M.				
3)	fitting installation works						
a)	4" dia. GI/HDPE Fittings	12.00	nos				
b)	4" dia. CI Sluice Valve	1.00	nos				
c)	3" dia. GI/HDPE fittings	8.00	nos				
d)	2" dia. GI/HDP fittings	12.00	nos				
e)	1/2" dia. GI/HDP fittings	400.00	nos				
4)	Back filling works by						
a)	Gravel and Boulder Mixed Hard soil	68.40	m3				
	Total Rs Part -A						
	VAT 13 %						
	Grand Tota Rs						
<b>In words</b>							

Contractor's Name:-

Address :-

Signature :-

Date :



# Kathmandu Upateyaka Khanepani Limited

## Mahankalchaur Branch Office

### Bill Of Quantity

Name of Project : 4" dia. HDPE Parallel pipeline connection & improvement works at Gaurighat Area  
Location : Kathmandu -7 Gaurighat

Date : 2081-10-25

S. No.	Description of works	QTY.	Unit	Rates		Amount Rs.	Remarks
				In Figure	In Words		
1)	4" dia. HDPE PN 10 Pipe	330.00	R.m.				
2)	1/2" dia. PPR Pipe	400.00	R.m.				
3)	fittings						
a	4" dia. GI flange	2.00	nos				
b	4" dia. CI Sluice Valve	1.00	nos				
c	4" dia. HDPE Flange set with adaptor	6.00	set				
d	4" dia. HDPE plug	1.00	nos				
e	2" dia. DI coupling	4.00	nos				
f	2" dia GI socket	5.00	nos				
g	2" dia.x6" GI nipple	3.00	nos				
h	1/2" dia. GI elbow	80.00	nos				
i	1/2" dia.x 3" GI nipple	80.00	nos				
j	1/2" dia GI socket	80.00	nos				
k	1/2" dia GI union	80.00	nos				
l	1/2" dia brass ferrol	80.00	nos				
m	Nutbolt	16.00	nos				
n	Rubber washer	1.00	sqm				
	Total Rs Part -B						
	VAT @ 13%						
	Total Rs-B						
	Total Rs Part A+B						

In words


Contractor's Name:-

Address :-

Signature :-

Date :



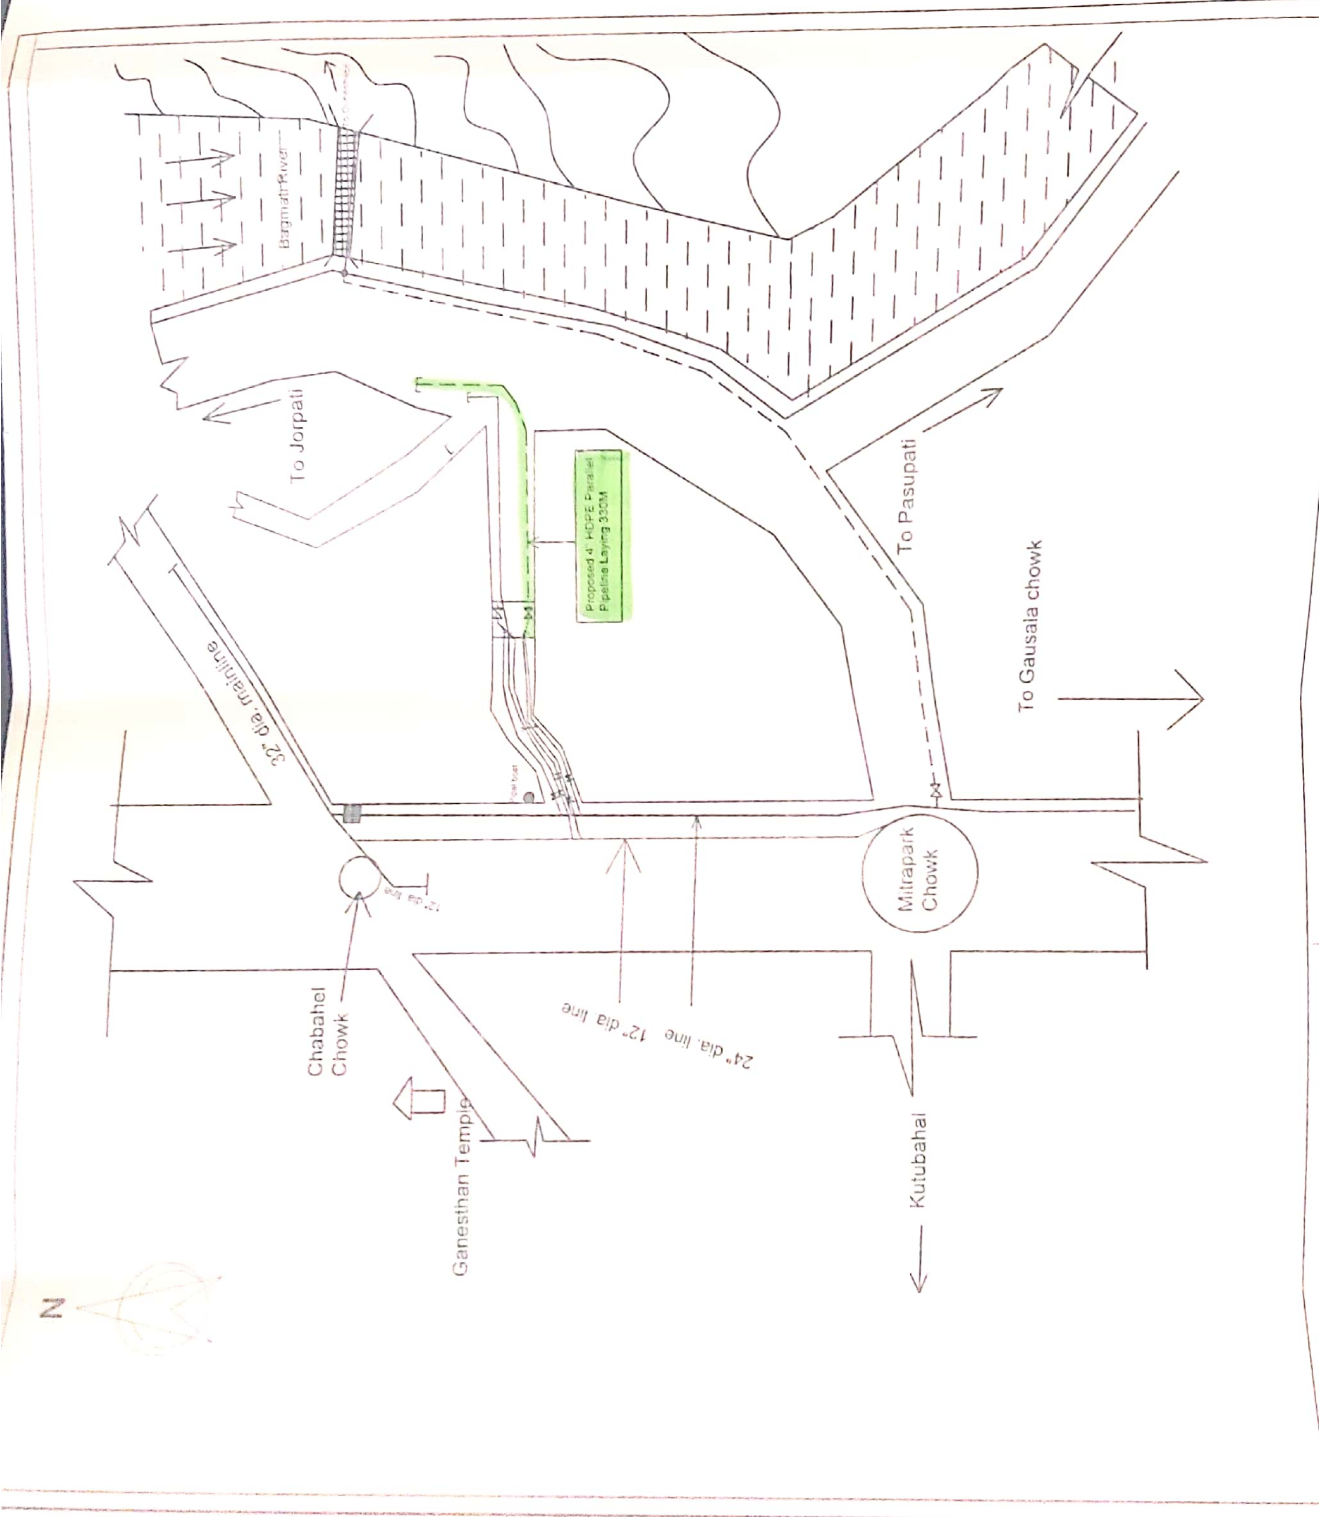

<b>KATHMANDU UPATYAKA KHANEPANI LTD</b> <b>MAHANKALCHAUR BRANCH</b>	SHEET TITLE: Location map of 4" dia. Pipeline Relaying works		DESIGNED BY:	SCALE:	SHEET NO: 1
			DRAWN BY:	DATE:	S/1
			CHECKED BY:		